

4K
Dual
Sided
Display
3 HDMI
2 USB
High
Brightness



Side A
2500 cd/m²



Sun Resistant

Side B
700 cd/m²




SWEDX Double Sided High Brightness Screens


SWEDX
Your Digital Signage Partner

Features	Specifications	Model ID	Model ID	Model ID	Model ID
		SDDS43K8-HB-01	SDDS49K8-HB-01	SDDS55K8-HB-01	SDDS65K8-HB-01
Color		White	White	White	White
Panel	Aspect Ratio	9:16			
	Panel Resolution	3840 x 2160 pixels			
	Refresh Rate	60 Hz			
	Static Contrast	3000:1			
	Brightness	Side A 2500 cd/m ² / Side B 700 cd/m ²			
	Response Time	6 ms			
	Viewing Angle	178/178			
Environment	Lead Presence	Yes			
	Mercury	0 mg			
Connections	Max Input Signal	3840 x 2160 @ 60Hz			
	HDMI	3 x HDMI 2.0 / 3 x HDMI 2.0			
	USB Media Player	2 x USB 2.0 / 2 x USB 2.0			
	Light Sensor	Side A			
	Remote Control	1			
	Digital Audio Output	2 x Coaxial			
Power	Power Consumption	260 W	340 W	380 W	450 W
	Power Consumption STB	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W
	Energy Class	G			
	Power Supply	AC 100-240 V ~ 50/60Hz			
Speakers	Audio Out	2 x 5 W (Side B)	2 x 5 W (Side B)	2 x 5 W (Side B)	2 x 5 W (Side B)
Dimensions	Product Width	See page 2			
	Product Height				
	Product Depth				
Weight	Net	21 kg	29 kg	32 kg	TBD
Dimension	Package (L x W x H)	118 x 24 x 82 cm	134 x 26 x 92 cm	146 x 26 x 100 cm	TBD
Weight	Gross	33 kg	39 kg	46 kg	TBD
Storage & Operating Conditions	Storage Temperature	-20 – 60 °C			
	Operating Temperature	-10 – 50 °C			
	Storage Humidity	5 – 90 %			
	Operating Humidity	5 – 90 %			


SDDS43K8-01

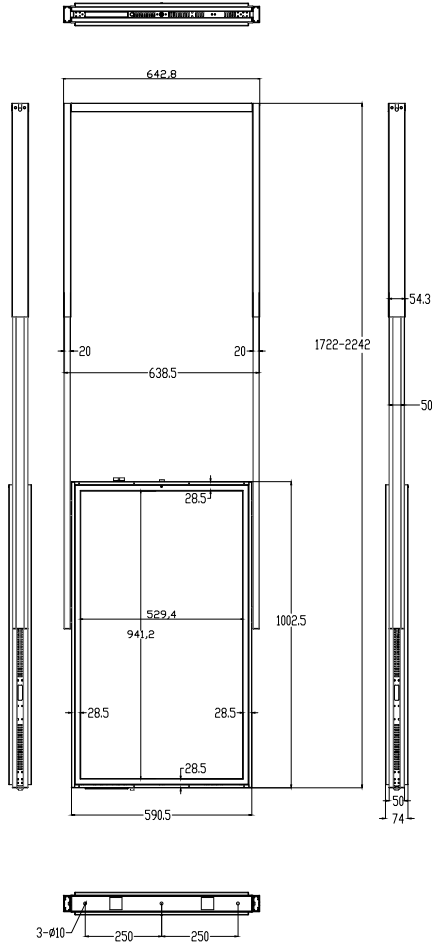

SDDS49K8-01

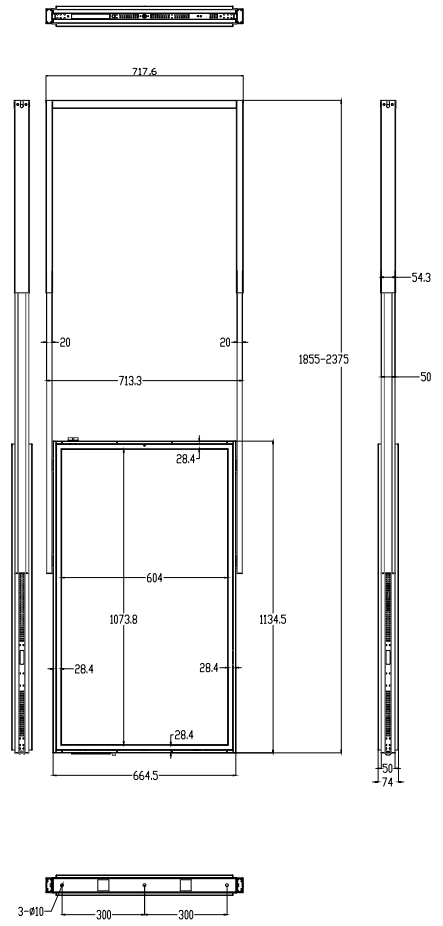

SDDS55K8-01

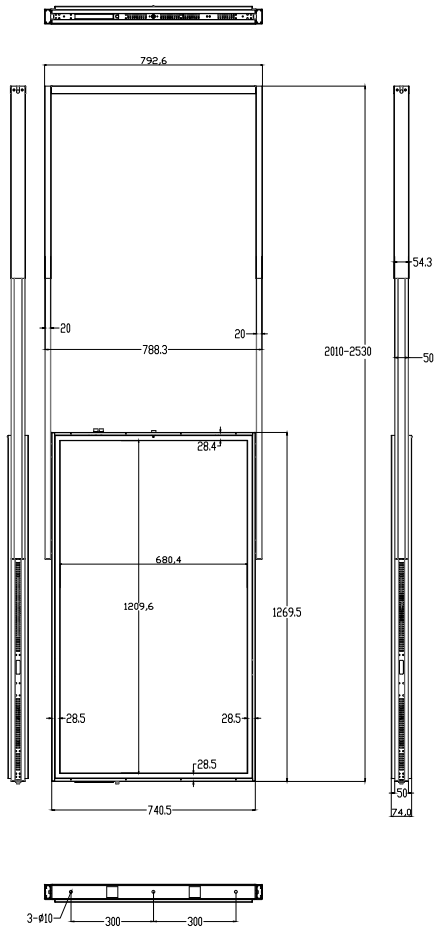

SDDS65K8-01

